

COMMERCIAL

ELECTRIC WATER HEATERS

LOWBOY MODELS AND TALL UNITS WITH SINGLE AND DUAL ELECTRIC HEATING ELEMENTS



Heat-flo's Commercial Electric Water Heaters are made with quality 316L stainless steel materials that provide a long tank life, abundant hot water, and low operating costs. Units are offered in 20, 30, 40, 50, 52, 66, 80 & 119-gallon capacities that are lightweight and durable, easy to install, and are sure to fit the needs of your customers.

FEATURES AND BENEFITS INCLUDE:

QUALITY DESIGN & CONSTRUCTION

- Tanks are all stainless steel construction, including cold water dip tube.
- Low watt density elements provide more surface area and less scale buildup.
- High R-value tank insulation meets or exceeds the requirements of the U.S. Department of Energy and ASHRAE.

EASY INSTALLATION

- All water connections are on top for a neat, quick, and clean installation.
- Inlet & Outlet Fittings are offset to make for seamless replacement of alternate diameters and/or brands.
- All units are shipped ready for installation:
 - » Brass drain valve and relief valve factory installed and tested.
 - » Top inlet and outlet supplied with dielectric unions and 3/4" x 4" type L copper leader for easy sweat or press connections.
- Front mounted electric service panel.


COMMERCIAL

- Models available in 20 - 119-gallon capacities.
- 3-Year Commercial Warranty & 1 year on component parts.



**MODELS SSL-20S | SSL-30D
SSL-40D | SSL-50D | SSN-40D | SSN-52D |
SSN-66D | SSN-80D | SSN-119D**
**DIELECTRIC UNIONS WITH 4" LONG 3/4" TYPE L
COPPER TUBES SUPPLIED STANDARD WITH UNITS.**

MODEL-SSL/SSN CONNECTION CONFIGURATIONS

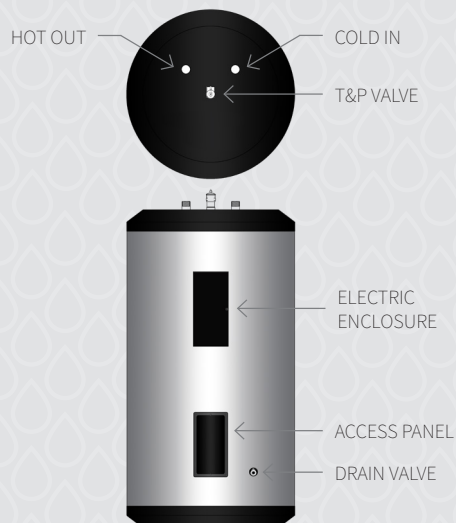

MODEL-SSL/SSN PRODUCT SPECIFICATIONS

MODEL NUMBER	GALLON CAPACITY	MAX KW INPUT	NUMBER OF ELEMENTS	HEIGHT TO TOP (INCHES)	DIAMETER (INCHES)	APPROX. SHIPPING WEIGHT (LBS.)
COMPACT MODELS - SINGLE ELEMENTS SUPPLIED W/ 120V 1500W HEATING ELEMENT STANDARD						
SSL-20S	20	6.1	1	24.5	23.5	35
COMPACTED MODELS - DOUBLE ELEMENTS SUPPLIED W/ 277V 6100W HEATING ELEMENTS WIRED 1 PH. SIMULTANEOUS						
SSL-30D	30	12.2	2	34.0	23.5	75
SSL-40D	40	12.2	2	38.0	28.0	90
SSL-50D	50	12.2	2	40.0	28.0	105
TALL MODELS - DOUBLE ELEMENTS *SUPPLIED W/ 277V 6100W HEATING ELEMENTS WIRED 1 PH. SIMULTANEOUS						
SSN-40D	40	12.2	2	44.0	23.5	90
SSN-52D	50	12.2	2	54.0	23.5	105
*SSN-66D	66	12.2	2	48.0	28.0	140
*SSN-80D	80	12.2	2	56.0	28.0	140
*SSN-119D	119	12.2	2	74.0	28.0	175

SSN/SSL	Guide for Elements in Electric Tanks Based on Model																						
Model #	United States																						
	Input (kW) per Element - Single Element											Input (kW) per Element - Dual Element											
	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.1	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.1	
SSL-20S	----	----	X	X	X	X	X	X	X	X	X	----	----	----	----	----	----	----	----	----	----	----	
SSL-30D	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
SSL-40D	----	----	----	----	----	----	X	X	X	X	X	----	----	----	X	X	X	X	X	X	X	---	
SSL-50D	----	----	----	----	X	X	X	X	X	X	X	----	----	----	X	X	X	X	X	X	X	X	
SSN-40D	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	X	
SSN-52D	----	----	----	X	X	X	X	X	X	X	X	----	----	----	X	X	X	X	X	X	X	X	
Key																							
Available		X																					
Unavailable		---																					

Heat-flo, LLC.

15 MEGAN CT., P.O. BOX 612, UXBRIDGE, MA 01569, USA

PHONE: (508) 278-2400 | FAX: (508) 278-2466

E-MAIL: SALES@HEAT-FLO.COM

WWW.HEAT-FLO.COM

© 2019 HEAT-FLO LLC. ALL RIGHTS RESERVED. HEAT-FLO, HEAT-FLO LOGO, AND RAISING THE STANDARD ARE TRADEMARKS OF HEAT-FLO LLC.
PART #SPEC SHEET_COMM_ELEC_MODEL-SSL,SSN_REV H-AHRI



Intertek

Conforms to STD 1453
and NSF/ANSI 372
Certified to CAN/CSA STD C22.2
NO. 110-94.